


Centura IP20

Fixed ring RGBW downlight

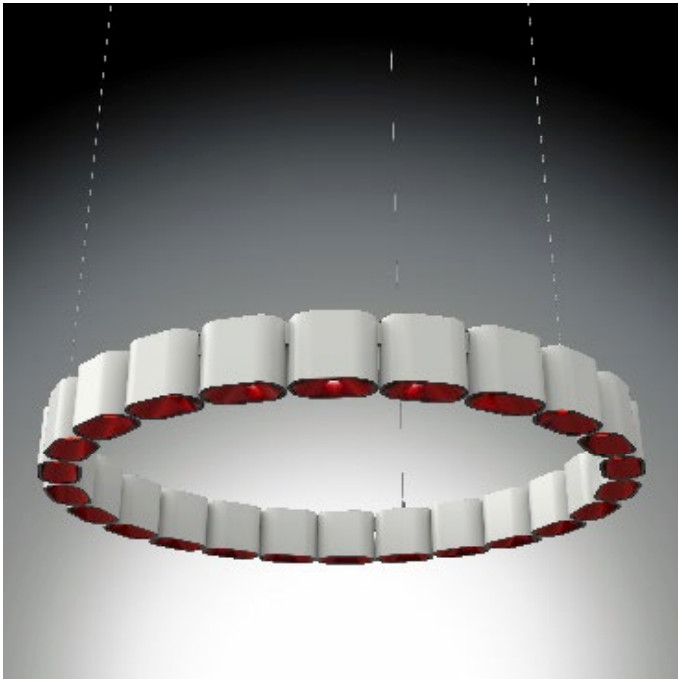

Standard ring diameters:

- Minimum ring size
- 9 modules - diameter = 350mm.
- 12 modules - diameter = 450mm
- 15 modules - diameter = 540mm
- 18 modules - diameter = 640mm
- + increments of approximately 100mm up to - 2mtr diameter

Ø350

Downlight:

Option for RGBW, RGB or single colour LED with colour mixing gaggione lens

Single LED RGB RGBW

Downlight - 1 x RGB, RGBW, RGBA or single colour LED per module

Modular RING LED pendant lighting system IP20 - Down light

Product description:

Modular ring LED pendants in a range of sizes with a RGB, RGBW or single coloured down light for use in a wide range of application areas including architectural, hospitality, leisure and retail

Each module:

Downlight - 1 x RGB, RGBW, RGBA or single coloured LED per module with colour mixing gaggione lens and asymmetric white reflector.

5 Watts per module

Up to 48 Volt DC supply

Integral LV constant current driver

Dimming options available: 1 - 10V, DMX and DALI

Various LED colour temperature and CRI options available

Satin black, satin white or any RAL paint colour finish for outer body finish

Standard sizes and custom diameter rings based on a 100 mm module up to 2 mtrs ø

Rod or cable suspension

Cable Rod Surface mount

Custom length to order Custom length to order

102mm (Based on 80mm nominal height) 83mm

Ø37.5

Module info:

Top cable entry

Variable height to order

Up to 5,000 Lumens per Mtr

EN 60598

Product Code	IP	No. of modules per pendant (overall ring diameter mm)	Colour Temp. (K)	CRI	Lens	Suspension Type	Optics	Feed	Finish
RAD CENTURA RING RGBW IP20	20	Standard Diameters 9 mod = 350mm 12 mod = 450mm 15 mod = 540mm 18 mod = 640mm Custom diameters: Min. ø = 350mm Increments of approximately 100mm up to - 2mtr diameter	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k RGB RGBW RGBA	80 90	N - 5° M - 10° W - 17° E - 6x20°	Steel Cable Surface mounted Fixed rod	Reflector	Top entry End entry	Black White Any RAL-colour