
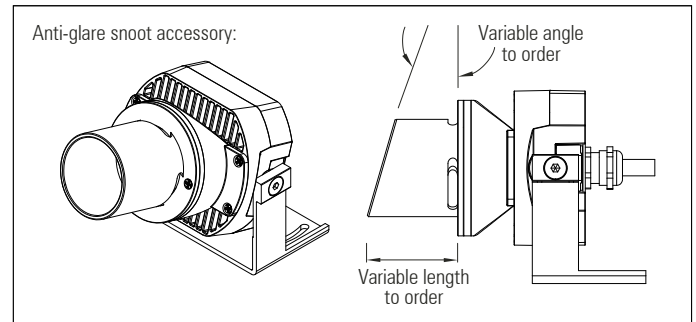
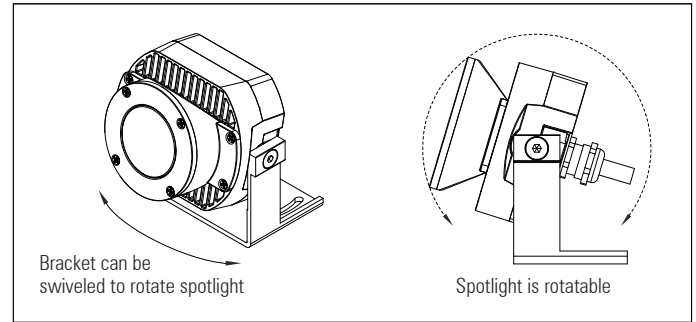


## D100 IP66 Spotlight

1 x high-power RGBW or Tunable-white LED cluster with lens  
Exterior LED spotlight range

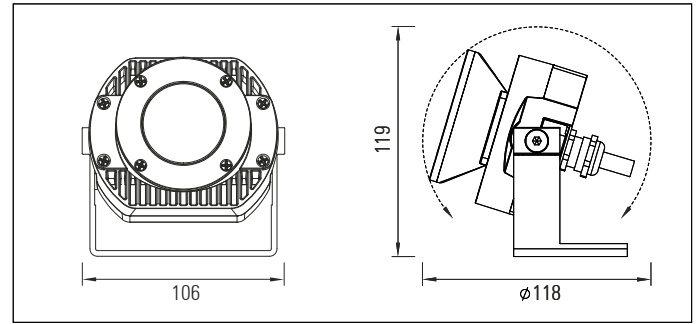

Up to 900 Lumens per spotlight  
with all 4 LEDs on full power

### D100 IP66 Spotlight

Exterior LED spotlight range with integral LV DC to DC driver or remote AC to DC driver

#### Product description:

The D100 IP66 spotlight range has been developed for use in architectural, landscape and garden lighting applications where powerful, highly controlled lighting effects are required

Each spotlight comprises 4 x Luxeon Z or CZ white-light or RGBW LEDs with a highly efficient colour-blending Gaggione lens, or a single colour-temperature white-light Citizen or Bridgelux LED COB with a Ledil Mirella reflector

A range of Gaggione lenses are available including a 3° ultra-narrow-beam lens

Up to 10 Watts per Spotlight

A wide range of LED colour temperature and CRI options are available

Rotatable in two axes using the adjustable angle brackets. Other mounting brackets are also available including custom designs

Both integral LV DC to DC driver and remote AC to DC driver versions are available - internal driver boards are potted in silicone resin

A wide variety of anti glare, beam control and colour filter accessories are available, including customisable anti-glare snoots which provide excellent visual comfort

Various dimming options available: 1 - 10, DALI, DMX. Separate dimming channel

Satin black, satin white or any RAL colour finish. Die-cast aluminium body

Product Code	IP	LED Type	Colour Temp. (K)	CRI	Cover	Optics (°)	Fixing Type	Finish	Anti-glare accessory
D100 IP66 LENS RGBW REMOTE DRIVER	66	Luxeon: Z LEDs CZ LEDs	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k	80 90	Clear Opal	Citizen COB with Ledil reflector: 15°, 30°, 40°, 80°	Adjustable - angle bracket Custom	Black White Any RAL colour	Snoot: Height: 20mm to 150mm (increments of 5mm) Cut-angle: 0° to 75° (increments of 5°) Honeycomb louvre
D100 IP66 LENS RGBW INTEGRAL DRIVER		Citizen or Bridgelux LED COB	RGB RGBW RGBA Dynamic white	95	Luxeon Z LEDs with Gaggione lens: 3°, 5°, 10°, 17°, 5x20° (Guide figures)				