
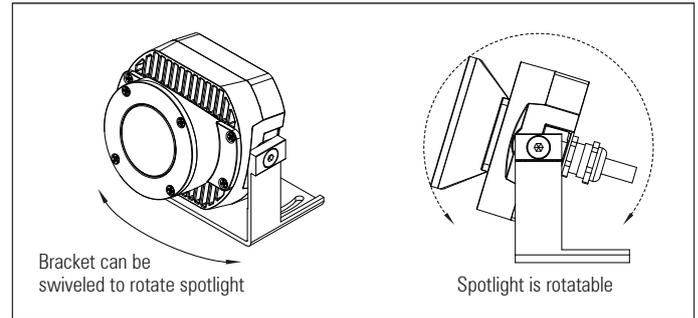


D100 IP66 Projector

1 x high-power LED with 3° beam lens

Exterior LED spotlight range

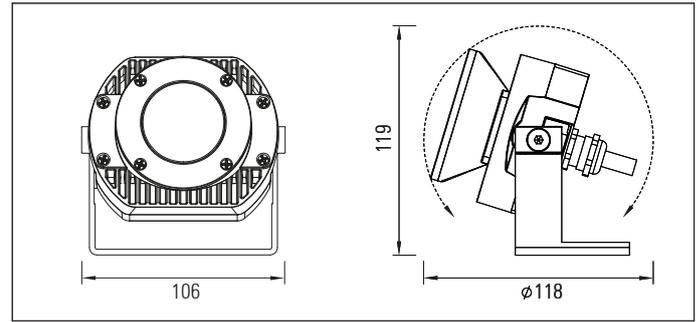

D100 IP66 Projector with 1 x high-power LED with 3° beam lens

Exterior LED projector range with integral LV DC to DC driver or remote AC to DC driver and extremely narrow beam with oval option for creative decorative lighting

Product description:

The D 100 IP66 projector range was developed for use in architectural, landscape and garden lighting applications, which require powerful, highly controlled lighting effects

Each projector comprises of: 1 x Cree XHP35 HI LED with a Gaggione ultra-narrow beam lens system which produces a 3° spotlight beam

Up to 10 Watts per spotlight

Rotatable in two axes using the adjustable angle brackets. Other mounting brackets are also available including custom designs to meet project requirements

Both integral LV DC to DC driver and remote AC to DC driver versions are available - internal driver boards are potted in silicone resin



Dimming options available: 1-10V, DMX and DALI. Separate dimming channel

Various LED colour temperature and CRI options available

Satin black, satin white or any RAL paint colour finish

Custom anti-glare snoot accessories can be specified - ensuring excellent visual comfort

Low iron UV block glass covers or UV stable polycarbonate window

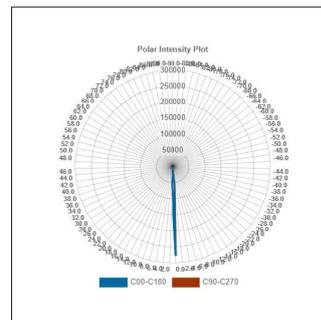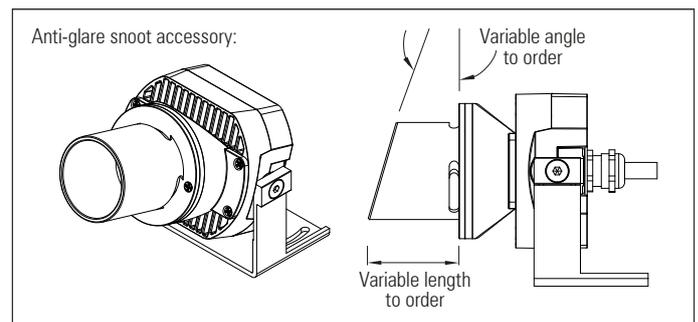

Up to 670 Lumens per spotlight

Product Code	IP	LED Type	Colour Temp. (K)	CRI	Optics (°)	Anti-glare Snoot	Fixing Type	Cover	Finish		
D100 IP66 3° LENS REMOTE DRIVER	66	Cree: XHP35 HI	22=2,200k	70 80 90	Ultra-narrow 3° spot beam	Cut-angle: 0° - 75° (increments of 5°)	Adjustable angle	Low iron UV block glass	Black		
D100 IP66 3° LENS INTEGRAL DRIVER			27=2,700k							30=3,000k	35=3,500k
						Height: specify height	Fixed angle		Any RAL colour		
							Custom height adjustable angle (specify leg height)				
							Custom solution				