
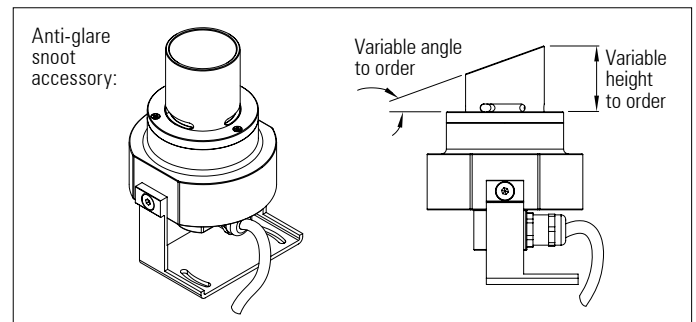
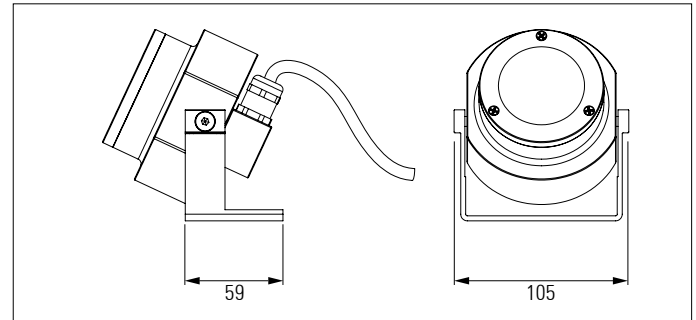


D100 IP65 Spotlight

Exterior LED spotlight range

Machined body version

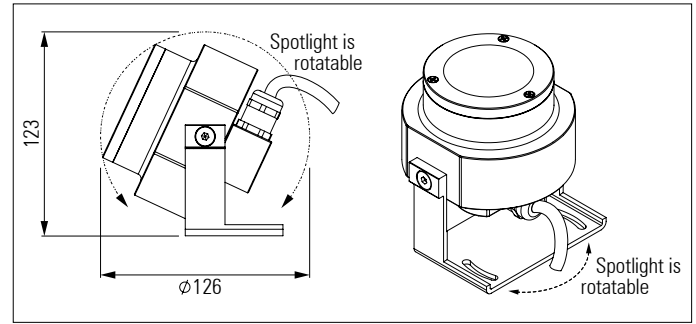

D100 IP65 Spotlight

Exterior LED spotlight range with integral LV DC to DC driver or remote AC to DC driver

Product description:

The D100 IP65 spotlight range has been developed for use in architectural, landscape and garden lighting applications where powerful, highly controlled lighting effects are required

Each spotlight comprises 4 x Luxeon Z or CZ white-light or RGBW LEDs with a highly efficient colour-blending Gaggione lens, or a single colour-temperature white-light Citizen or Bridgelux LED COB with a Ledil Mirella reflector

A range of Gaggione lenses are available including a 3° ultra-narrow-beam lens

Up to 10 Watts per Spotlight

A wide range of LED colour temperature and CRI options are available

Rotatable in two axes using the adjustable angle brackets. Other mounting brackets are also available including custom designs

Both integral LV DC to DC driver and remote AC to DC driver versions are available - internal driver boards are potted in silicone resin

A wide variety of anti glare, beam control and colour filter accessories are available, including customisable anti-glare snoots which provide excellent visual comfort

Various dimming options available: 1 - 10, DALI, DMX. Separate dimming channel

Satin black, satin white or any RAL colour finish. Machined aluminium body

Up to 800 Lumens per spotlight

Product Code	IP	LED Type	Colour Temp. (K)	CRI	Cover	Optics (°)	Fixing Type	Finish	Anti-glare accessory
D100 IP65 MACHINED REMOTE DRIVER	65	Luxeon: Z LEDs CZ LEDs	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k	80 90 95	Clear Opal	Citizen COB with Ledil reflector: 15°, 30°, 40°, 80°	Adjustable - angle bracket Custom	Black White Any RAL colour	Snoot: Height: 20mm to 150mm (increments of 5 mm) Cut-angle: 0° to 75° (increments of 5°) Honeycomb louvre
D100 IP65 MACHINED INTEGRAL DRIVER		Citizen or Bridgelux LED COB	RGB RGBW RGBA Dynamic white			Luxeon Z LEDs with Gaggione lens: 3°, 5°, 10°, 17°, 5x20° (Guide figures)			