
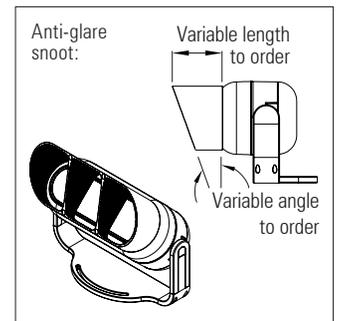
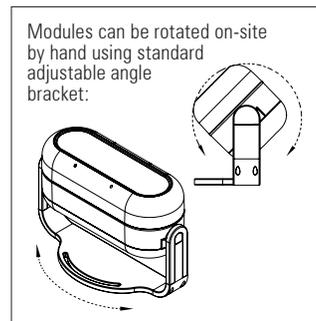


D 200 IP66

3 x high-power LEDs with collimator lenses
Exterior LED spotlight range

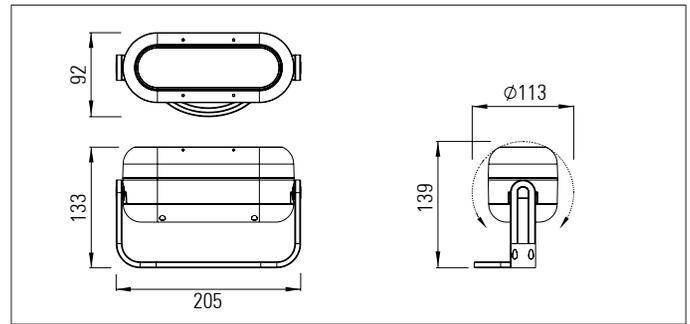

D200 IP66 Spotlight with 3 x high-power CREE XHP 35.2 LEDs with collimator lenses

Exterior LED spotlight range with integral LV DC to DC driver or remote AC to DC driver and or remote Dali dimmable driver and collimator lenses with a range of beam angle options including ultra narrow and elliptical beam for projects requiring highly controlled accent lighting from a compact luminaire.

Product description:

Each spotlight comprises of 3 x Cree XHP 35.2 LEDs, with 45mm ϕ Gaggione collimator lenses

Up to 25 Watts per spotlight

Rotatable around the major axis. Other mounting brackets are also available including custom designs to meet project requirements.

A vertical configuration bracket with elliptical narrow beam lenses can produce a high-power blade of vertical light

Either integral LV DC to DC drivers, integral AC to DC drivers, or remote AC to DC driver options are available


Various LED colour temperature and CRI options available

Satin black, satin white or any RAL paint colour finish


Custom anti-glare snoot accessories can be specified - ensuring excellent visual comfort. Honeycomb and micro-louvre accessories are also available

Low iron UV block glass covers or UV stable polycarbonate window

* Also see data sheet for Tunable-white version with Luxeon Z cluster with colour-blending lenses

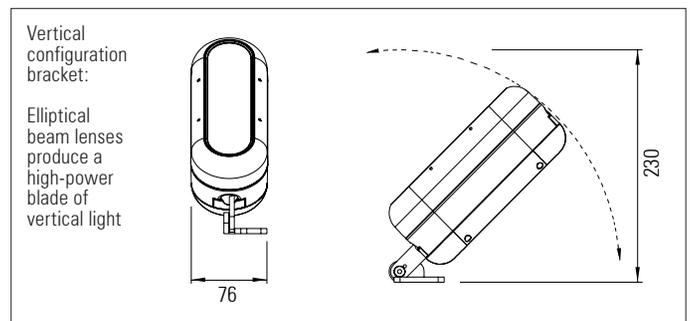

Up to 2,200 Lumens per spotlight

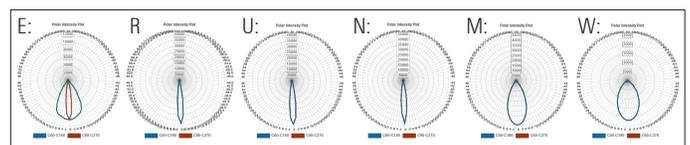

Product Code	No. of LEDs per spotlight	IP	LED Type	Optics	Colour Temp. (K)	CRI	Anti-glare Snoot	Bracket Type	Feed	Finish
D 200 IP66 3X LED LENS REMOTE DRIVER	3 LEDs per 200mm spotlight: 56mm pitch	20	Cree: XHP35.2	Gaggione LLC49 series: E: 9.1x48.3° R: 7.5° U: 7.6° N: 8.3° M: 22.4° W: 33.4°	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k Dynamic white	Cree: 80 90	Cut-angle: 0° - 75° (increments of 5°)	Adjustable	End Back Side	Black White Any RAL-colour
D 200 IP66 3X LED LENS INTEGRAL DRIVER AC/DC								Fixed		
D 200 IP66 3X LED LENS INTEGRAL DRIVER DC/DC								Custom		
							Height: specify height	Vertical configuration		