


Euclid 20 Balljoint IP64 H.O.

High output version with spring clip mounting

Exterior, modular, 3D flexible LED linear lighting system




Custom lengths up to 2.5 Mtrs based on a nominal 100mm module length

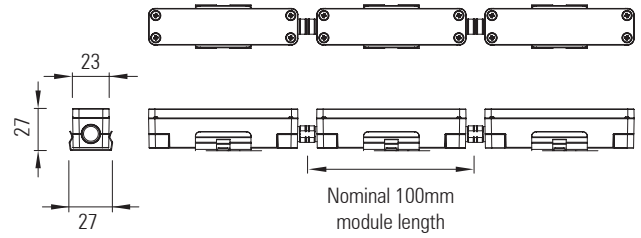

Standard minimum bend radii:

Custom ball joints can give different bend radii where needed

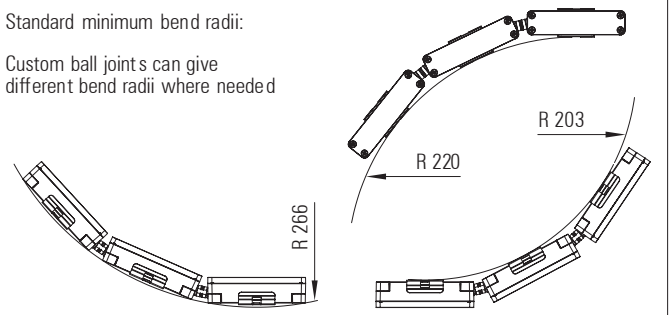

High output version - 240 x mid power LEDs per Mtr

Modular, 3D flexible LED linear lighting system - Up to 3,000 lumens per mtr with 3,000 K 80 CRI LEDs.

Product description:

For use in exterior indirect lighting applications including cove lighting, wall grazing and wall washing where the building surfaces are non linear with curved profiles

240 x Luminus medium power 0.15 Watt LEDs per Mtr

Up to 30 Watts per Mtr

On board linear drivers. Remote 24 V DC power supply

Wide range of LED colour temperature and CRI options available

Spring clip mounting bracket with slim profile

Various dimming options available: 1 - 10, DALI, DMX. Separate dimming channel

Side, or end power feed and connector options allow for continuous lighting - up to 8 mtrs can be lit from a single feed point. 16 Amp IP67 connectors join fixtures together on-site

Black, white or any RAL paint colour finish

Optical film can be specified to provide a diffuse output

* Dynamic-white option does not use a colour mixing lens

Up to 3,500 Lumens per Mtr

Product Code	No. of LEDs	IP	Length (mm)	LED Type	Optics (°)	Colour Temp. (K)	CRI	Cover	Fixing Type	Feed	Finish
EUCLID 20 BALLJOINT IP64 H.O.	24 LEDs per 100mm module 3.3mm LED pitch between LEDs	64	100mm -increments of 100mm up to- 2,500mm	0.15W LEDs: Luminus	110° Optical film	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k Dynamic white	80 90	Clear Opal	Spring clip	End Side	Black White Any RAL-colour