




Micro Pendant System IP20

Micro Reflector Pendant Miniature interior 3 Watt LED pendant

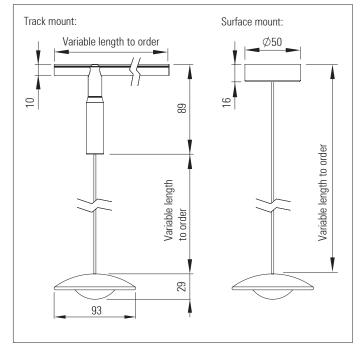

Micro Reflector LED Pendant

Miniature LED pendant for use with Radiant Micro Track system or with surface mount base

Designed to be used in a wide variety of hospitality and residential applications where the quality and control of light is of high importance.

Product description:

Miniature 3 Watt pendant

Each pendant - 6 x 0.5 Watt LEDs with white reflector

Various LED colour temperature and CRI options available

The light output contains very little heat or $\ensuremath{\mathsf{UV}}$ - ideal for the illumination of sensitive materials

Miniature DC to DC dimmable LV constant current driver housed in the track adapter or surface mount base. Remote AC/DC constant current driver option also available.

Dimming options available: 1 - 10V, DALI or DMX

Decorative 3mm ϕ silicone covered cable, 4mm ϕ fabric covered cable, or 4mm ϕ rod suspension.

Any powder coat or anodised finish - white reflector on visible interior surface

Up to 200 Lumens per pendant

Product Code	IP	LED Type	Colour Temp. (K)	CRI	Mounting Type	Metalwork finish	Cable colour	Suspension type
MICRO REFLECTOR PENDANT IP20	20	Nichia	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k	80 90	Surface - mount base	Anodized: Black White Silver Other colour - options available Any RAL powder coat	Black White Clear Blue Red Grey Green Other colours on request	Silicone covered cable: 3mm Ø. Specify length.
					Micro Track (see Micro Track data			Fabric covered cable: 4mm Ø. Specify length.
					sheet for options)			Rod: 4mm Ø. Specify length (up to 1 mtr).
					Custom			, ,

