



## RAD Track 4 Spotlight range RAD D100 spotlight LED spotlight range





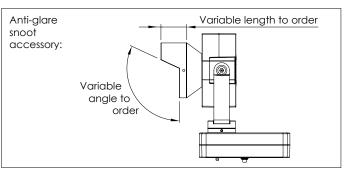

**RAD Track 4 with D100 Spotlight** 

4-conductor track system with LED spotlights

## **Product description:**

Each spotlight head - 10 Watt Citizen or Sharp COB

Low voltage track with 4 conductors - including 2 for dimming

Dimming options include DMX, DALI and 1-10V. Manual and remote dimming options

DC to DC constant current driver housed in each track-box

48V DC Input

Various LED colour temperature, CRI options and beam angles available


Anti-glare snoot accessory and honeycomb louvre acessory available

Fully lockable in both axes

Spotlights come in anodized silver, satin black, satin white or any RAL colour finish

Track available in satin black, satin white or any RAL colour finish

The track comes in custom lengths based on a 200mm module length, up to 2 Mtrs



0 1000 2000 3000 Lumens per spotlight

EN **C E** 

Product Code	IP	Colour Temp. (K)	CRI	Optics	Track length	Track finish	Spotlight finish	Anti-glare snoot
RAD TRACK4 D100 SPOT	20	27=2,700k 30=3,000k 40=4,000k 45=4,500k 50=5,000k	80 90	Citizen: 20° Sharp: 17° 24° 20° 29° 29° 36° 39° 42° 45° 48°	200mm - increments of 5mm up to - 150mm	Black White Any RAL- colour	Black White Any RAL- colour Anodized- silver	Height (mm): 20mm - increments of 5mm up to - 150mm Cut angle (°): 0° - increments of 5° - up to 75°

Radiant Architectural Lighting 10 Broadbent Close 20 - 22 Highgate High Street London N6 5JW ENGLAND UK T: + 44 ( 0 ) 20 8348 9003 F: + 44 ( 0 ) 20 8348 6478 E: david@radiantlights.co.uk www.radiantlights.co.uk Products and literature designed by DAVID MORGAN ASSOCIATES June 2016