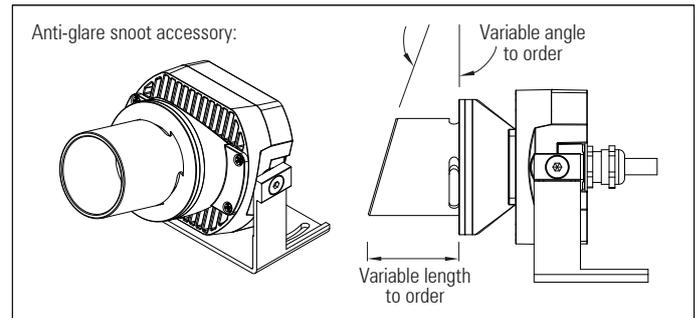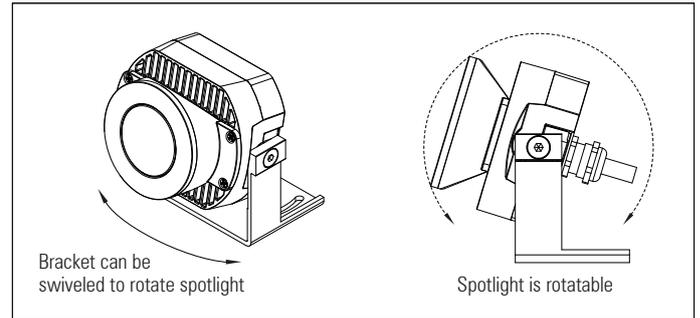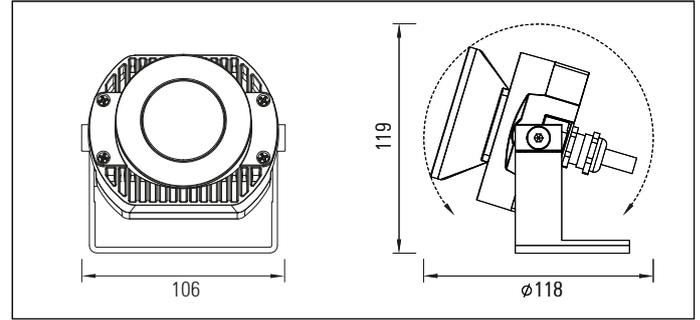# D100 IP20 RGBW 45G Projector

1 x high-power RGBW or Tunable-white LED cluster with lens
Interior LED projector range

Bracket can be swiveled to rotate spotlight

Spotlight is rotatable

Anti-glare snoot accessory:

Variable angle to order

Variable length to order

Up to 390 Lumens per projector with all 4 LEDs on full power

D100 IP20 RGBW 45T Projector

Interior LED projector range with integral LV DC to DC driver or remote AC to DC driver

Product description:

The D100 IP20 RGBW 45G spotlight range has been developed for use in architectural, and display lighting applications where powerful, highly controlled lighting effects are required

Each spotlight comprises 4 x Luxeon Z or Rubix RGBW LEDs with a highly efficient colour-blending Gaggione lens.

A range of Gaggione lenses are available including a 7.6 degree narrow-beam lens

Up to 10 Watts per Spotlight

A wide range of LED colour temperature and CRI options are available

Rotatable in two axes using the adjustable angle brackets. Other mounting brackets are also available including custom designs

Both integral LV DC to DC driver and remote AC to DC driver versions are available - internal driver boards are potted in silicone resin

A wide variety of anti glare, beam control and colour filter accessories are available, including customisable anti-glare snoots which provide excellent visual comfort

Various dimming options available: DALI, DMX.

Satin black, satin white or any RAL colour finish. Die-cast aluminium body

Product Code	IP	LED Type	Colour Temp. (K)	CRI	Cover	Optics (°)	Fixing Type	Finish	Anti-glare accessory
D100 IP20 RGBW 45G REMOTE DRIVER D100 IP20 RGBW 45G INTEGRAL DRIVER	66	Luxeon: Z LEDs Rubix LEDs	22=2,200k 27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k RGB RGBW RGBA Dynamic white	80 90	Clear Opal	Luxeon Z LEDs with 45 mm Gaggione lens: 7.6°, 8.1°, 11.7° x 29.4°, 32° (Guide figures)	Adjustable - angle bracket Custom	Black White Any RAL colour	Snoot: Height: 20mm to 150mm (increments of 5 mm) Cut-angle: 0° to 75° (increments of 5°) Honeycomb louvre