
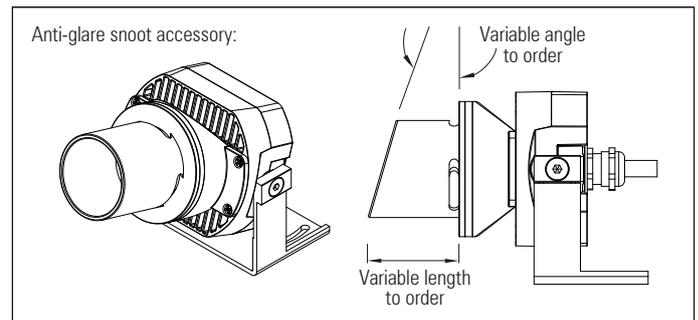
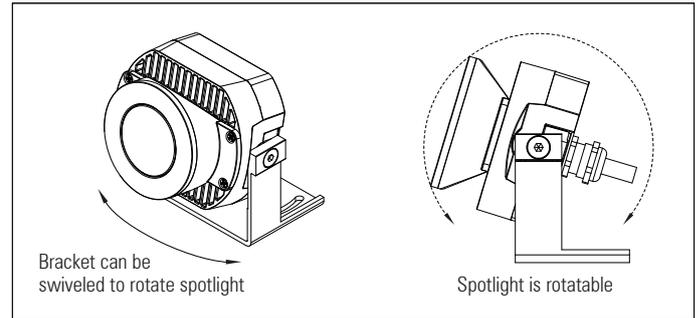


D100 IP20 TW 45G Projector

Interior LED projector range

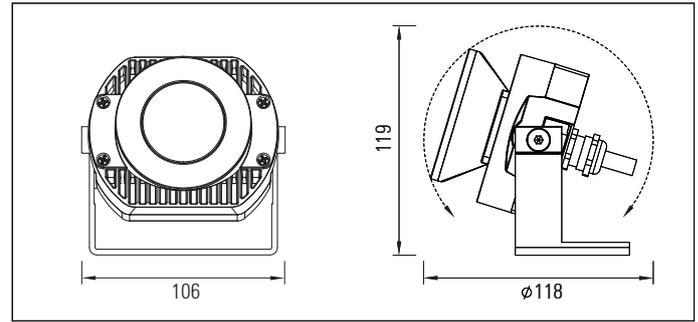

Up to 750 Lumens per projector
with all 4 LEDs on full power

D100 IP20 TW 45 G Projector

Interior LED projector range with integral LV DC to DC driver or remote AC to DC driver

Product description:

The D100 IP20 TW 45G spotlight range has been developed for use in architectural, and display lighting applications where powerful, highly controlled lighting effects are required

Each spotlight comprises 4 x Luxeon Z or Rubix WWWW LEDs with a highly efficient colour-blending Gaggione lens.

A range of Gaggione lenses are available including a 7.6 degree narrow-beam lens
Up to 10 Watts per Spotlight

A wide range of LED colour temperature and CRI options are available

Rotatable in two axes using the adjustable angle brackets. Other mounting brackets are also available including custom designs

Both integral LV DC to DC driver and remote AC to DC driver versions are available - internal driver boards are potted in silicone resin

A wide variety of anti glare, beam control and colour filter accessories are available, including customisable anti-glare snouts which provide excellent visual comfort

Various dimming options available: DALI, DMX.

Satin black, satin white or any RAL colour finish. Die-cast aluminium body

Product Code	IP	LED Type	Colour Temp. (K)	CRI	Cover	Optics (°)	Fixing Type	Finish	Anti-glare accessory
D100 IP20 WWWW 45G REMOTE DRIVER	20	Luxeon: Z LEDs Rubix LEDs	22=2,200k	80	Clear	Luxeon Z LEDs with 45 mm Gaggione lens: 7.6°, 8.1°, 11.7° x 29.4°, 32° (Guide figures)	Adjustable - angle bracket Custom	Black	Snoot: Height: 20mm to 150mm (increments of 5 mm) Cut-angle: 0° to 75° (increments of 5°) Honeycomb louvre
D100 IP20 WWWW 45G INTEGRAL DRIVER			27=2,700k		Opal			White	
			30=3,000k				Any RAL colour		
			35=3,500k						
			40=4,000k						
			45=4,500k						
			50=5,000k						
			RGB						
			Dynamic white						