
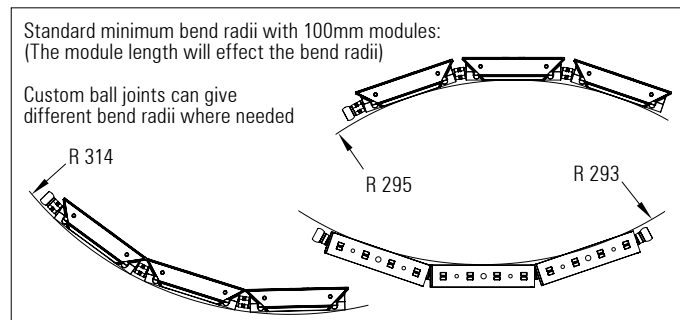


Euclid 20 Balljoint IP20

0.3 Watt medium power LEDs

Modular, 3D flexible LED linear lighting system

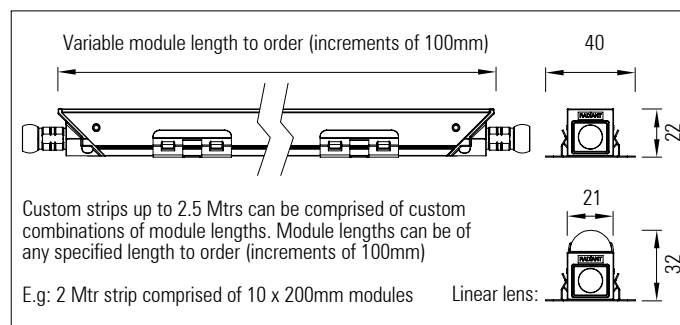

80 x 0.3 Watt medium power LEDs pe Mtr

Modular, 3D flexible LED linear lighting system

Product description:

For use in interior indirect lighting applications including cove lighting, wall grazing and wall washing where the building surfaces are non linear with curved profiles

Strips up to 2.5 Mtrs can be comprised of custom combinations of modules of any specified length (increments of 100mm). E.g. a 2 Mtr strip comprised of 10 x 200mm modules. This allows it to go from a straight section directly into a curved section

Osram, Samsung or Luminus medium power 0.3 Watt LEDs

Up to 25 Watts per Mtr

Integral DC to DC low voltage linear drivers. Remote 24 V DC power supply

Continuous LED pitch across strips

Wide range of LED colour temperature and CRI options available

40° linear-lens is available

Mounting options include spring clips or custom bracket options


Various dimming options available: 1 - 10, DALI, DMX. Separate dimming channel

Side, end or back power feed and connector options allow for continuous lighting - Up to 8 mtrs can be lit from a single feed point. 16 Amp IP20 connectors join fixtures together on-site


Black, white or any RAL paint colour finish

* Dynamic-white option does not use a colour mixing lens


Side or end power feed options:



Spring-clip mounting bracket:



Angled mounting wedge:



Up to 1,800 Lumens per Mtr

Product Code	No. of LEDs per mtr.	IP	Length (mm)	LED Type	Optics (°)	Colour Temp. (K)	CRI	Cover	Fixing Type	Feed	Finish
EUCLID 20 BALLJOINT 0.3W IP20	80 LEDs per Mtr: 25mm LED pitch between arrays of 2 LEDs	20	Modules: 100mm up to 2500mm (increments of 100mm) (Specify quantity of modules)	0.3W LEDs: Osram Samsung Luminus	120° 40° linear lens Optical film	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k Dynamic white	80 90	Clear Frosted Opal	Spring-clip	End Back Side	Black White Any RAL-colour
									Custom		
									Wedge: Specify angle		